



Mountain Prime Tile Collection

TECHNICAL SPECIFICATIONS

DESCRIPTION

Mountain Prime Tile Collection is a Solid Polymer Core flooring (aka. SPC) with Tile Look, Enhanced Bevels, Pre-attached Pad and Super Protect & Antimicrobial Coating

SIZE

Coverage Area	15.5 sq. ft./box
Product Width	12"
Product Length	24"
Product Overall Thickness	7mm (0.276")
Wearlayer Thickness	20mil
Pre-attached Pad	1mm (0.04")
Weight/Box	38 lbs
Weight/Pallet	2116 lbs

DETAILS

Features	Waterproof
Flooring Product Type	Plank
Indoor/Outdoor	Indoor Only
Installation Type	Floating With Locking System
Material	Core: Limestone, Virgin PVC
Finish	UV-cured Urethane Coating With Super Protect & Antimicrobial Coating
Texture	Granite Texture
Edges	Enhanced Bevels
Scratch Resistance	Yes
Stain Resistance	Yes
Open Room Area	Should not exceed 50 linear ft. in either direction or 2,500 sq. ft.
After Installation	32°F (0°C) - 104°F (40°C)



SF3117

6+1mm mountain prime tile



SF3117



SF3127



SF3137



SF3147



www.greentouchflooring.com

DDC TEXAS INC. 1461S Belt Line Rd #300, Coppell, TX 75019 (469) 906-2787 office@ddcfloors.com

DDCC North America INC. 5026 Harding Pl, Nashville, TN 37211 (865)249-4754 office@ddcfloors.com

DDCC GLOBAL SOURCING INC. 330 King St, Elk Grove Village, IL 60007, USA (773)704-0439 office@ddcfloors.com

Mountain Prime Tile Collection

TECHNICAL SPECIFICATIONS


WARRANTY

Residential Warranty	Limited Lifetime
Commercial Warranty	12 Years

CERTIFICATIONS

FloorScore	Certified
Greenguard Gold	Certified
CE	Certified
Indoor Air Comfort Gold	Certified

PERFORMANCE	TEST STANDARD	REQUIREMENT	CONCLUSION
Dimensional Stability	ASTM F2199	$\leq 0.024"$ per linear foot	Pass
Curling	ASTM F2199	-	Pass
Static Load	ASTM F970	-	<5mil @ 250lbs
Residual Indentation	ASTM F1914	Average < 8%	Pass
Color Resistance to Heat	ASTM F1514	$\Delta E < 8$	Pass
Color Resistance to Light	ASTM F1515	$\Delta E < 8$	Pass
Resistance to Chemicals	ASTM F925	Slight change only	No change
Static Coefficient of Friction	ASTM C1028	≥ 0.5 (reference)	Pass
Impact Sound Insulation Class (IIC)	ASTM E492 & E989	-	61 dB (w/drop ceiling)
Airborne Sound Transmission Loss Class (STC)	ASTM E90 & E413	-	62 dB (w/drop ceiling)
Soluble Heavy Metals	ASTM F 963-17	-	Not detected
Total Lead (Pb)	CPSC-CH-E1002-08.1	-	Not detected
Ortho-Phthalates	CPSC-CH-C1001-09.4	-	Not detected
VOC Emission	CA 01350	OEHHA RELs	FloorScore/Greenguard Gold Certified
Formaldehyde Emission	CA 01350	$\leq 9 \mu\text{g}/\text{m}^3$	Not detected
Effect of A Castor Chair	ISO 4918:2009	-	No visible damage @ 198lbs
Thermal Resistance (R Value)	ASTM C518	-	Suitable for underfloor heating
Critical Radiant Flux	ASTM E648	$\geq 0.45 \text{ watts}/\text{cm}^2$	Class I

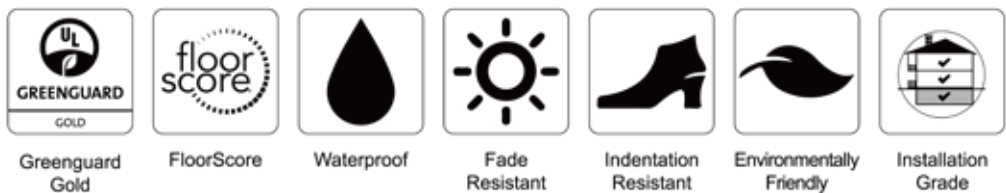

www.greentouchflooring.com